


Windload Charts | AG601T Series


A = 16 P.S.F. (766 Pa) Description: 2" X 6" Center Glazed for 1" Glass
 B = 20 P.S.F. (958 Pa) Function: Storefront
 C = 25 P.S.F. (1197 Pa) Detail: Design Criteria
 D = 30 P.S.F. (1436 Pa) Scale: N.T.S.
 E = 40 P.S.F. (1915 Pa)

SHEET 1 OF 1

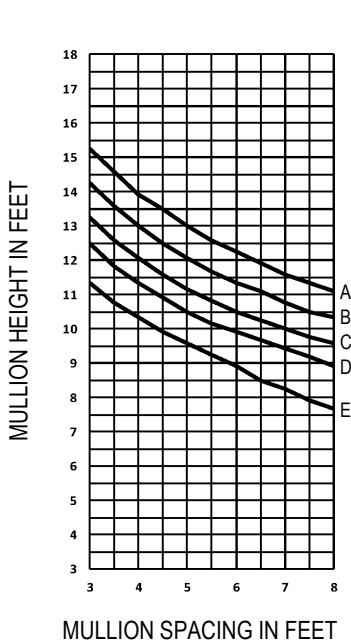

$I = 5.763 \text{ IN}^4$
 $S_1 = 1.758 \text{ IN}^3$ $S_2 = 0.256 \text{ IN}^3$

TG302 / TG210

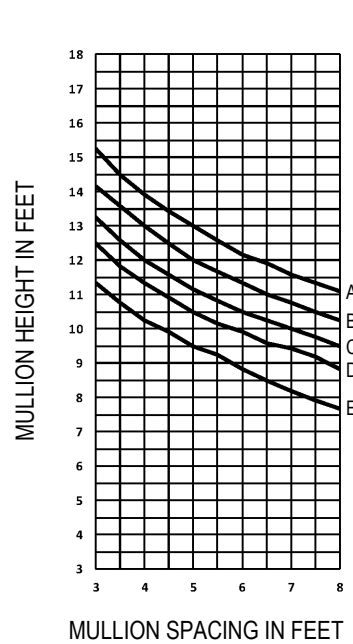


$I = 5.718 \text{ IN}^4$
 $S_1 = 1.758 \text{ IN}^3$ $S_2 = 0.237 \text{ IN}^3$

MULLION SPACING IN FEET


TG302 / TG200

- Mullions are assumed to be single span, simple beam elements, uniformly loaded and adequately braced to prevent lateral-torsional buckling. All other complex design conditions shall be reviewed by Arcadia or a design professional.
- Aluminum extrusions shall be 6063-T6 alloy. Allowable stresses to be derived per Aluminum Design Manual. Deflection limitation of mullions shall be in accordance with AAMA TIR-A11 of L/175 for spans up to 13'-6" and L/240 + 1/4" for all others where L is equal to the span of mullion.
- A design professional shall be consulted to confirm that no lite of glass deflects more than H/175 or 3/4", whichever is less, where H indicates the height of glass.
- For mullions containing steel reinforcement, the reinforcement is assumed to be installed for the full length of the mullion. A design professional shall be consulted for instances where steel reinforcement is installed for a partial length of the mullion span.
- Windload pressure determinations shall be per ASCE 7 and according to local governing codes. A professional engineer shall be consulted for the most current laws and local building codes.
- Selection of perimeter fasteners and attachment of glazing system to building structure are project specific and therefore shall be reviewed and determined by a design professional.
- Arcadia assumes no responsibility for selecting the appropriate systems for specific projects.

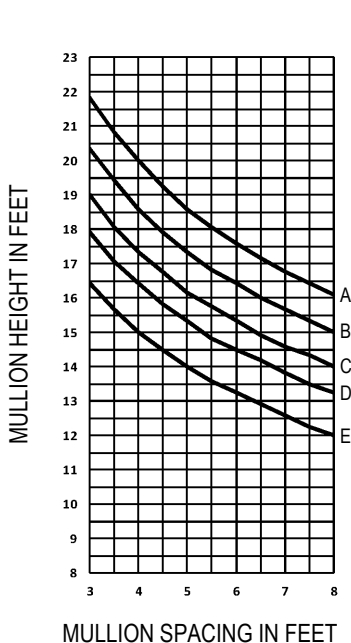

$I = 18.260 \text{ IN}^4$

TG302 / TG200 WITH STEEL REINFORCEMENT
1 3/8" X 5 11/16" X 10 GA.

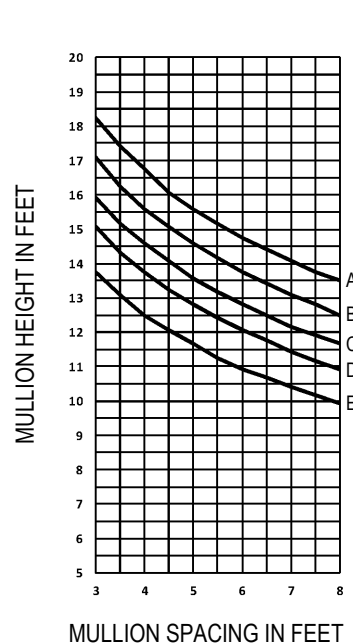


$I = 10.338 \text{ IN}^4$
 $S = 3.437 \text{ IN}^3$

MULLION SPACING IN FEET

TG304

Consult Your Local Arcadia Representative For Special Applications Not Covered By These Curves.



Deadload Charts | AG601T Series

Description: 2" X 6" Center Glazed for 1" Glass


Function: Window Wall

Detail: Design Criteria


Scale: N.T.S.

Deadload Charts for 1" Glass (7.00 PSF)

SHEET 1 OF 1

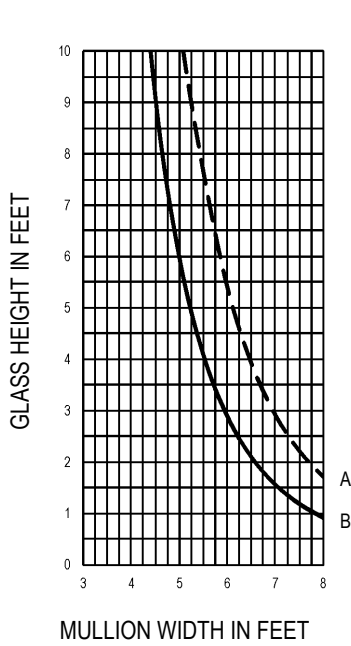

$I = 0.477 \text{ IN}^4$
 $S = 0.445 \text{ IN}^3$



TG303 - 1" GLASS

CURVE REPRESENTATION

A (----) = 1/8" PTS.

B (—) = 1/4" PTS.