


Windload Charts

A = 16 P.S.F. (766 Pa)
 B = 20 P.S.F. (958 Pa)
 C = 25 P.S.F. (1197 Pa)
 D = 30 P.S.F. (1436 Pa)
 E = 40 P.S.F. (1915 Pa)


CASSETTE T500 SSG CLAD WALL

Description: 2 1/2" x 7 1/4" Glazed for 1" Glass
 Function: Curtain Wall
 Detail: Design Criteria
 Scale: N.T.S.

SHEET 1 OF 1

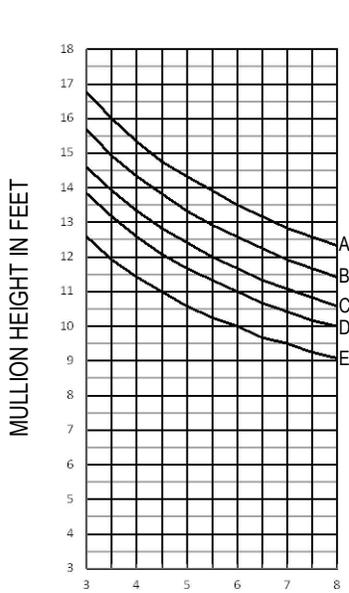


$I = 7.816 \text{ IN}^4$
 $S = 2.686 \text{ IN}^3$




MULLION SPACING IN FEET

OPG1910CS

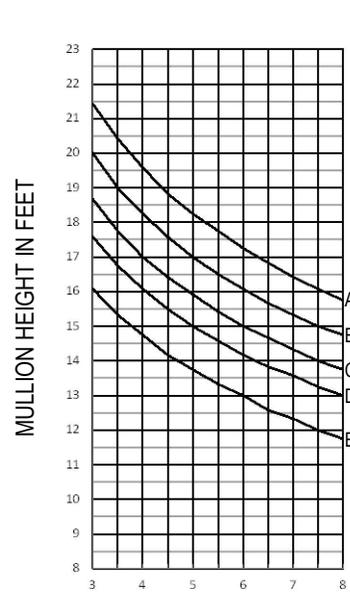

$I = 17.144 \text{ IN}^4$



MULLION SPACING IN FEET

OPG1910CS WITH
 STEEL REINFORCEMENT
 2" X 4 1/2" X 10 GA.

- Mullions are assumed to be single span, simple beam elements, uniformly loaded and adequately braced to prevent lateral-torsional buckling. All other complex design conditions shall be reviewed by Arcadia or a design professional.
- Aluminum extrusions shall be 6063-T6 alloy. Allowable stresses to be derived per Aluminum Design Manual. Deflection limitation of mullions shall be in accordance with AAMA TIR-A11 of $L/175$ for spans up to 13'-6" and $L/240 + 1/4"$ for all others where L is equal to the span of mullion.
- A design professional shall be consulted to confirm that no lite of glass deflects more than $H/175$ or $3/4"$, whichever is less, where H indicates the height of glass.
- For mullions containing steel reinforcement, the reinforcement is assumed to be installed for the full length of the mullion. A design professional shall be consulted for instances where steel reinforcement is installed for a partial length of the mullion span.
- Windload pressure determinations shall be per ASCE 7 and according to local governing codes. A professional engineer shall be consulted for the most current laws and local building codes.
- Selection of perimeter fasteners and attachment of glazing system to building structure are project specific and therefore shall be reviewed and determined by a design professional.
- Arcadia assumes no responsibility for selecting the appropriate systems for specific projects.

Consult Your Local Arcadia Representative For Special Applications Not Covered By These Curves.



Deadload Charts

CASSETTE T500 SSG CLAD WALL

Description: 2 1/2" x 7 1/4" Glazed for 1" Glass


Function: Curtain Wall

Detail: Design Criteria


Scale: N.T.S.

Deadload Charts for 1" Insulated Glass (7.00 psf)

SHEET 1 OF 1

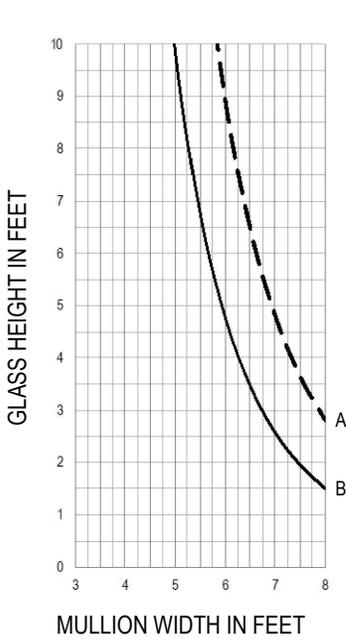

$I = 0.845 \text{ IN}^4$
 $S = 0.562 \text{ IN}^3$



OPG1900CS - 1" GLASS

CURVE REPRESENTATION

A (---) = 1/8 PTS.

B (—) = 1/4 PTS.