


## **AHT Series Door Closer**

# Adjustable Spring Power Closer

Tested and approved for all ANSI GRADE 2 requirements

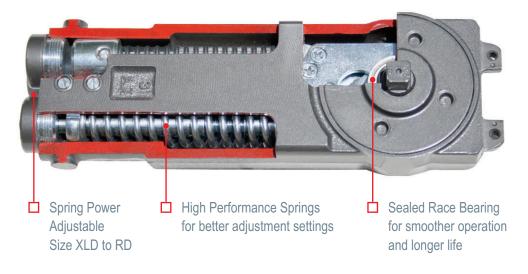


- **Meets ADA Barrier-free Requirements** 5 Lbs. exterior/interior opening force
- **Adjustable Spring Power** From Size XI D to RD
- Universal One closer for all applications
- **Fully Independent Valves**
- **Maintenance Free**



1301 Lewis Street Anaheim, CA 92805 t. 213-500-4137 f. 866-798-0206 www.aht-tech.com sales@aht-tech.com

## **AHT Series Door Closer**

## **Dimensions**

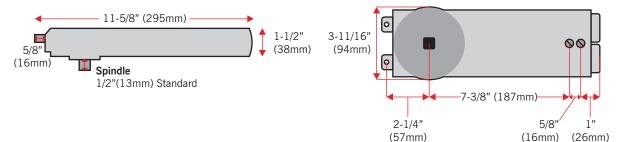

## How to order

#### Part # AHT-505

Overhead Concealed

Adjustable Spring Power Closer

"Center Hung"

#### Includes:

Arm Package Standard Pivot Package Standard Clip Package

#### Part # AHT-605

Overhead Concealed Adjustable Spring Power Closer "Offset Arm & Slide Channel"

#### Includes:

Offset Arm & Slide Channel Package Standard Clip Package



Advanced Hardware Technologies

DOOR CONTROL EXPERTS

1301 Lewis Street Anaheim, CA 92805 t. 213-500-4137 f. 866-798-0206 www.aht-tech.com sales@aht-tech.com

## **Technical Information**

Dimensions: All AHT Series Overhead Closers are built to fit into

a 1-3/4" x 4" (44.5 x 101.5mm) header.

 Length:
 11-5/8" (295mm)

 Height:
 1-1/2" (38mm)

 Width:
 3-11/16" (94mm)

Weight: Center Hung Pkg. 10lbs. (4.5kg)

Offset Pkg. 11lbs. (5.0kg)

NOTE: Weights will vary depending on package type.

#### Features:

•Dual Valve Closing Control - Both sweep and latch speeds are independently adjustable.

•Adjustable Spring Power - Size XLD thru RD. This will allow you to set an opening force which will meet Barrier-Free requirements for both interior and exterior doors in one closer

·Hold or Non-Hold Open

•90° or 105° Swing

•UL Listed, meets UL228 (Non-Hold Only)

Action: Non-Handed Design

Single or Double Acting

Center-Hung or Offset Applications

